

PL-14 Level In

INSTALLATION INSTRUCTIONS




comenza

Railing Passion

I samarbejde med:



www.comenza.com
WWW.INTERGLAS.DK

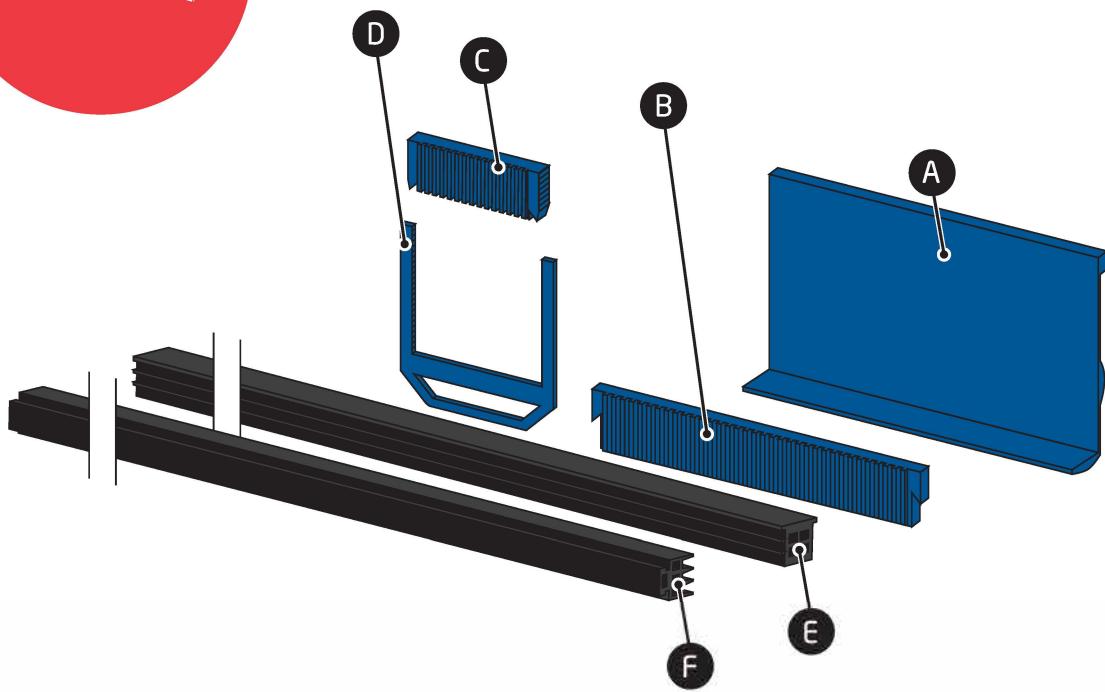

Dele til produktet

Nº	Elementer	LG	
A		--	10
B		--	10
C		--	10
D		--	10
E		2500	1
F		2500	1

*The PL-14 Level In Kit tillader kun glaspaneler med 2 eller 4 2 or 4 butyllag.

Nødvendige elementer ikke inkluderet

Nº	Elementer	
1	BR-2041	
2	BR-2039	


Advarsel

Brugeren er ansvarlig for at bestemme hvorvidt oplysningerne angivet egner sig til det specifikke formål, som produktet vil blive brugt til. På grund af den store mangfoldighed af materialer der findes på markedet samt de mange forskellige anvendelsesformer, der er uden for vores kontrol, anbefaler vi, at der i hvert tilfælde foretages praktiske tests og tilstrækkelige kontroller for at sikre produktets egnethed i hver enkelt applikation. Indholdet af dette dokument må ikke reproduceres, helt eller delvist, uden skriftlig tilladelse fra COMENZA.

Step 1 - Installering af kilerne A

Installer den L-formede kile (del "A" fra PL-14 Level In kittet) mod profilens yderside med en maksimal afstand på 250 mm mellem kilerne og 125 mm fra glaspanelets kanter (afstanden refererer til midtpunkterne i kilerne).


Glasset skal vippes lidt mod ydersiden (Ext.), så det kan justeres lodret mod indersiden (Int.) senere.

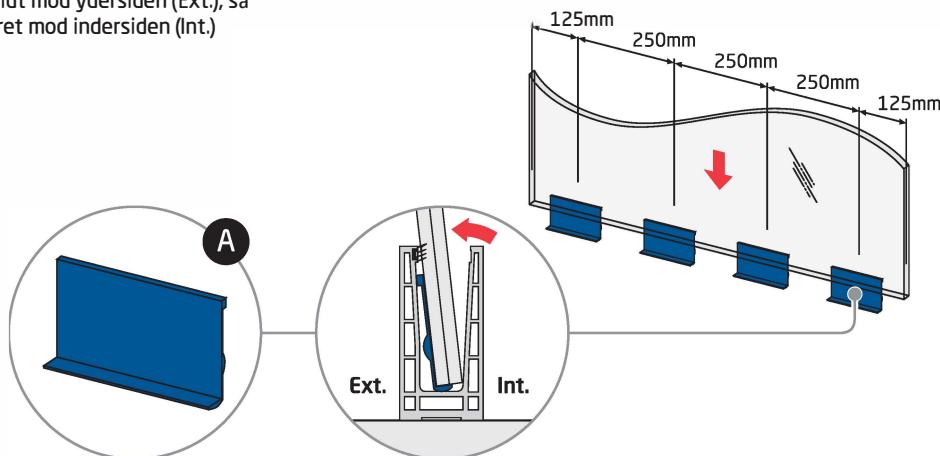

Step 2 - Installering af "Bundkilen" B

Installer de nederste "Bundkilder" (del "B" fra PL-14 Level In kittet) direkte overfor (modsat) de tidligere installererede "A" kilder. Lad dem falde mellem glas og profil, uden at spænde dem.

POSITION AF KILER:

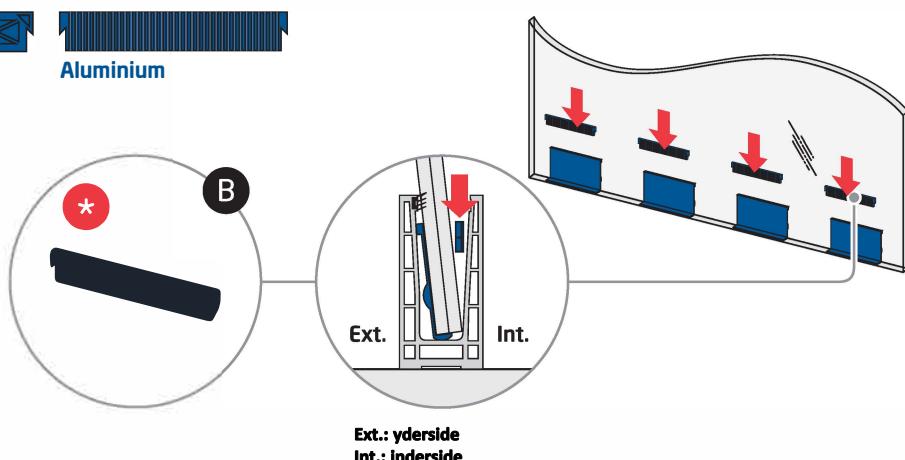

* Sørg for, at kilerne er installeret korrekt ved at følge "glasside" indikationen

Step 3 - Installering af "Topkiler" C og del D

Installer de øvre "Topkiler" (del "C" med sikkerhedsenheden "D" fra PL-14 Level In kittet), der er anbragt mellem de nederste "B" bundkiler.

POSITION AF KILER:




Glas






Aluminium




*Disse kiler skal installeres i deres højeste position for at muliggøre vertikal justering (vipning) af glasset mod indersiden senere.

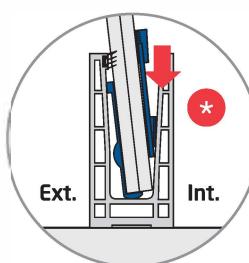

Ext.: yderside
Int.: Inderside

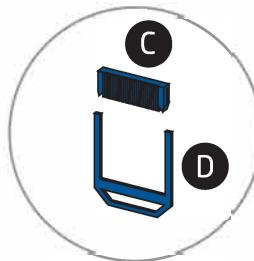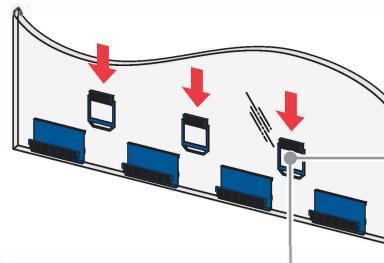


Hold glasset ved dets øverste del, træk det mod det indenlevende så kilerne falder ned, men uden at gå ud over en lodret position. For at påbegynde den vertikale justering, start med at have glasset justeret/vippet lidt mod ydersiden.

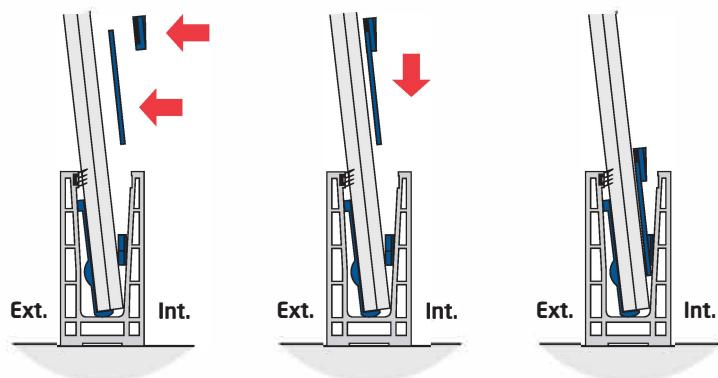


Vigtigt:

De øverste "Topkiler" skal placeres mellem "Bundkilerne", men aldrig ved siden af glaspanelernes kanter.

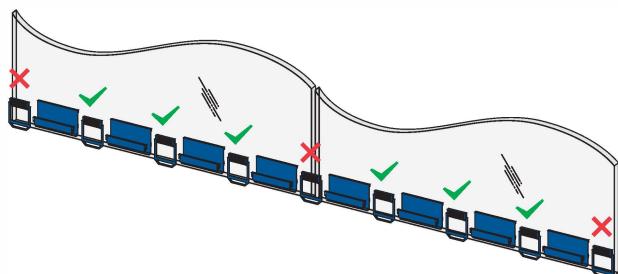


Step 4 - Lodret justering med "Bundkilen"

Lodret justering (vipning) af glasset udføres ved at banke de nederste "B" kiler eller "Bundkiler" nedad, da det får glasset til at vippe fra ydersiden mod indersiden. Bank "B" kilerne nedad indtil en lodret position er opnået.

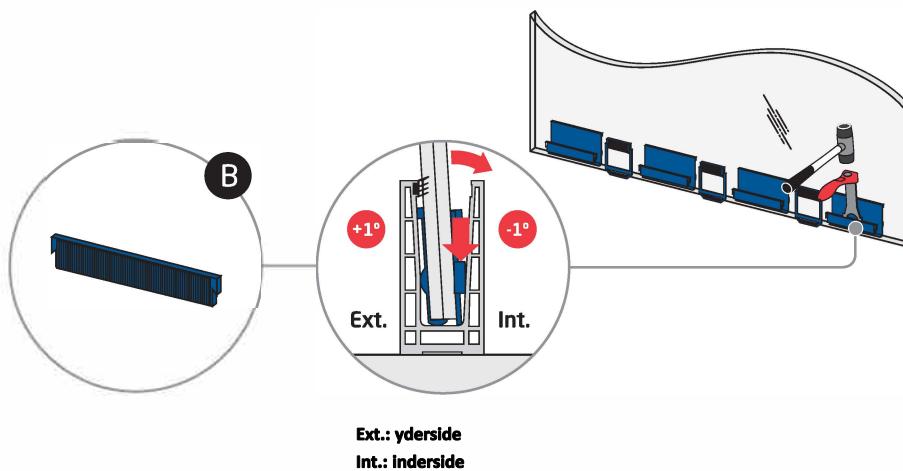


Step 5 - Lås positionen af "Topkilerne"

Når glasset er justeret lodret, skal du let ramme den øverste "C" kile eller "Topkile" for at låse den vertikale indstilling og forhindre glasset i at skifte eller vippe mod indersiden.

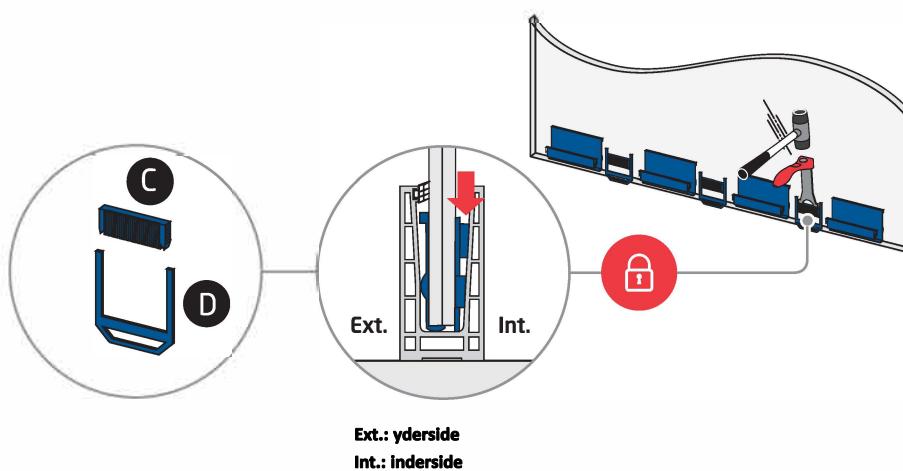


Step 6 - Fastgørelse af glasset ved hjælp af "Bundkilerne"

Når glasset er blevet justeret til en lodret position, skal det fastgøres. Banks de nederste "B" kiler eller "Bundkiler" og de øvre "C" kiler eller "Topkiler" nedad, for så glasset kan tåle en tryklast. Hvis det bliver nødvendigt at rette en smule på positionen, kan du gøre det ved at slå på de øvre kiler.

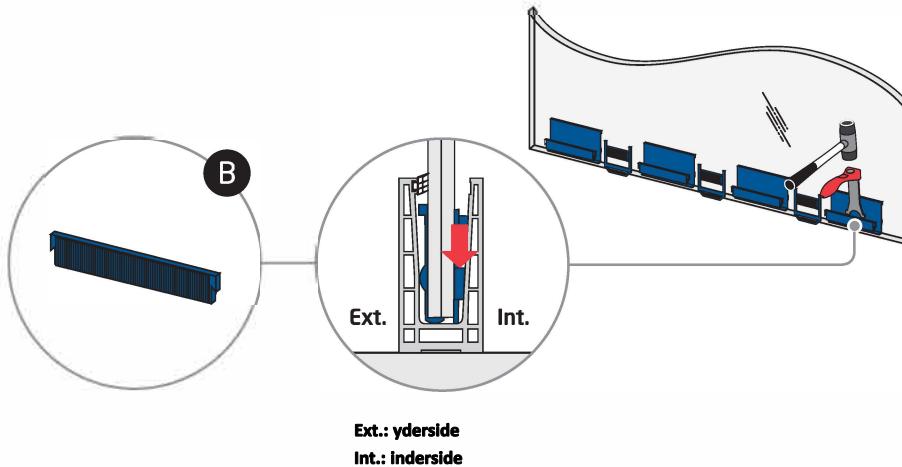

Step 7 - Kontrol af sikkerhedsanordningen

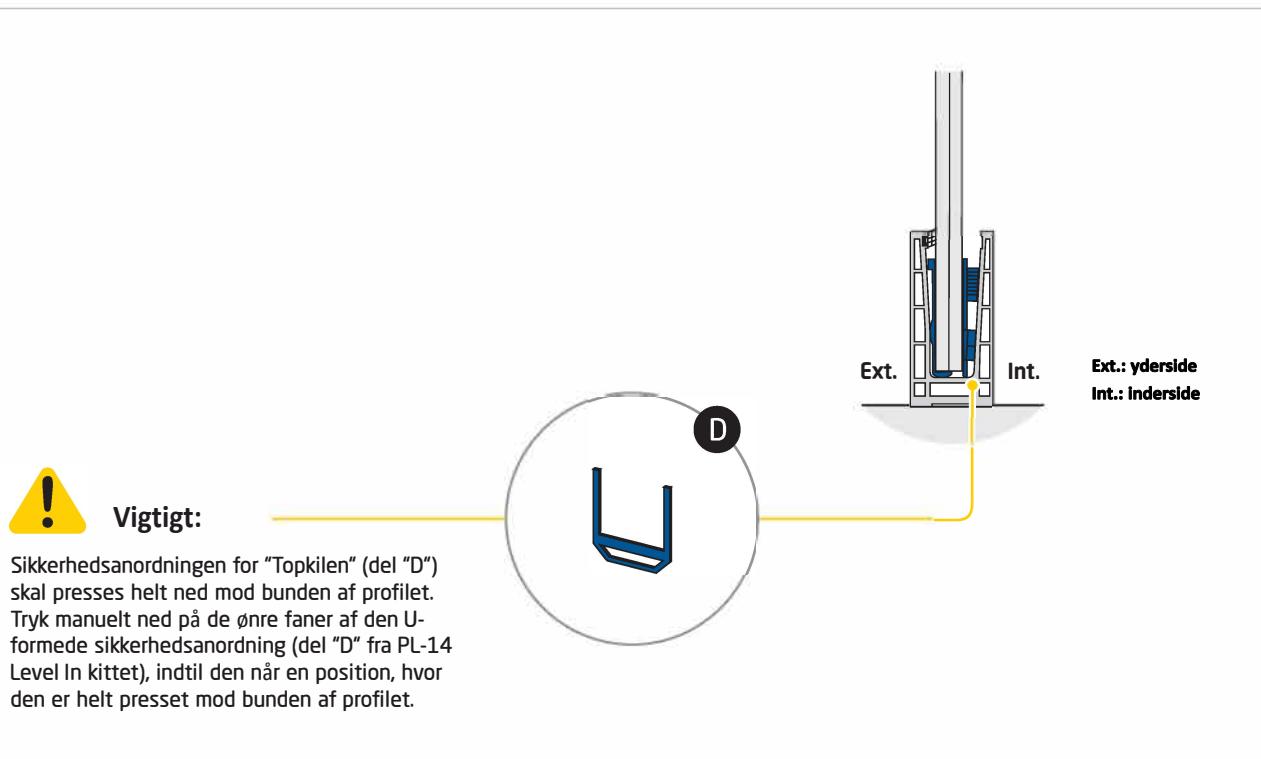



Leverandør:

Comenza, S.l.

Avda. Benigno Rivera 100,
Pol. Ind. Ceao 27003 (Lugo), Spain
T +34 982 207 227
F +34 982 209 589

www.comenza.com
sales@comenza.com

Distributør:

Interglas ApS

Kornmarksvej 10
2605 Brøndby, Denmark
T +45 21216363

www.interglas.dk
interglas@interglas.dk

GlassFit SV-1402 SIDE

Test Report 18-016
Denmark DS/EN 1991-1-1 DK NA:2013



CONTENTS

1. INTRODUCTION	2
2. TEST SAMPLES	2
3. TEST PROGRAMME	2
4. TEST METHOD	2
5. RESULTS	3
TABLES	4
PLATES	5
CHARTS	7
APPENDIX: Figures	9

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

1. INTRODUCTION

On May 20th 2018 the balustrade system **GlassFit SV-1402 SIDE** was tested according to the requirements of **DS/EN 1991-1-1 DK NA:2013 - National Annex to Eurocode 1: Actions on structures – Part 1-1: General actions – Densities, self-weight, imposed loads for buildings**. Country of application: Denmark.

The testing was carried out by Comenza Engineers at Comenza's test facilities at Pol. Ind. Ceao, 27003, Lugo, Spain.

This report summarises the test results obtained during the test programme and does not provide interpretation of those results.

2. TEST SAMPLES

The aluminium channel tested was designated as **GlassFit SV-1402 SIDE**. The fixing system was designated as **PL-14**. The system is shown in Figure 1 and Figure 2.

The channel was installed by Comenza personnel.

3. TEST PROGRAMME

A horizontal line load was carried out on the aluminium channel with the following glass type installed:

- 17.52mm Laminated Tempered Glass with PVB foil 8/8/4 – size (w x h) 1000 mm x 1107 mm

4. TEST METHOD

The channel was bolted to the top of a concrete block. The 1.0 m length of channel was bolted to the block at 250 mm centres using the appropriate fixings.

The appropriate thickness glass panel was fitted into the channel using the "Level In / PL-14" adjustable fixing system such that the plastic clip was to the inside face of the glass (see Figure 2).

A horizontal imposed line load was applied to the glass at a height of 1.000 mm above de datum level of the floor and the deflection measured at the top central point of the panel 1.000 mm above de datum level of the floor. The load was applied via a hydraulic ram and the deflection measured using a digital electronic displacement transducer (see Plate 1 and 2, and Figure 1).

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

5. RESULTS

The test was carried out according with the guidance given in **DS/EN 1991-1-1 DK NA:2013 - National Annex to Eurocode 1: Actions on structures – Part 1-1 : General actions – Densities, self-weight, imposed loads for buildings.**

This standard categorises partition walls and parapets for areas of use depending on the loads they have achieved under testing.

The loads achieved by the Comenza Glassfit SV-1402 glazing system tested under horizontal imposed line load are given in Table 1.

All figures quoted in Table 1 contain no safety factors and are direct loads as achieved by the system under test conditions.

Table 2 summarises the suitability of the tested system in accordance with Table 6.12 of **DS/EN 1991-1-1 DK NA:2013** - National Annex to Eurocode 1: Actions on structures – Part 1-1: General actions – Densities, self-weight, imposed loads for buildings.

NOTE: The results given in this report apply only to the samples that have been tested.

END OF REPORT

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

TABLES

Table 1 – Summary of Performance of Comenza Balustrade System Tested under Horizontal Imposed Line Load

Base	Glass	Height of Applied Load mm	Working Line Load for System (kN/m)	Deflection at Working Line Load for System (mm)
GlassFit SV-1402 Side Level In / PL-14	Laminated Tempered PVB Glass 17.52 mm	1000	0.5	15.06
GlassFit SV-1402 Side Level In / PL-14	Laminated Tempered PVB Glass 17.52 mm	1000	1	32.42

Table 2 – Summary of Suitability of Comenza Balustrade System in Accordance with Table 6.12 of DS/EN 1991-1-1 DK NA:2013- Horizontal loads on partition walls and parapets

Loaded areas	Description	Horizontal uniformly Distributed Line Load qk [kN/m]	SV-1402 SIDE Level In PL14 17.52mm LT PVB Glass
Category A	A: Areas for domestic and residential activities	0,5	✓
Category B and C1	B: Office areas	0,5	✓
	C1: Areas where people may congregate: Areas with tables	0,5	✓
Category C2 - C4 and D	C2: Areas where people may congregate: Areas with fixed seats C3: Areas where people may congregate: Areas without obstacles for moving people C4: Areas where people may congregate: Areas with possible physical activities D1: Shopping areas: Areas in general retail shops D2: Shopping areas: Areas in large shops and department stores	1,0	✓
Category C5	C5: Areas where people may congregate: Areas susceptible to large crowds	3,0	-

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

PLATES



Plate 1 – Generic Test Arrangement

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

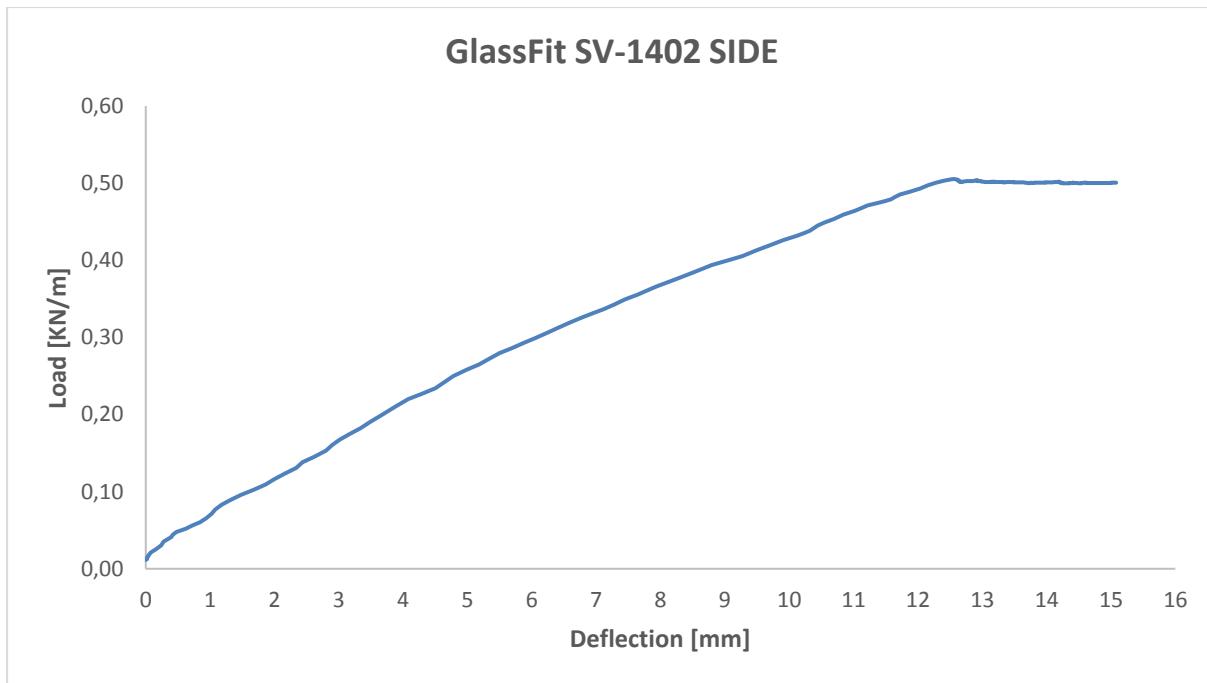


Plate 2 – Generic Test Arrangement


* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

CHARTS

Chart 1 – Load Versus Deflection Curves for Comenza Glassfit SV-1402 Side Level In / PL -14 [Q=0,5 kN/m]




* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

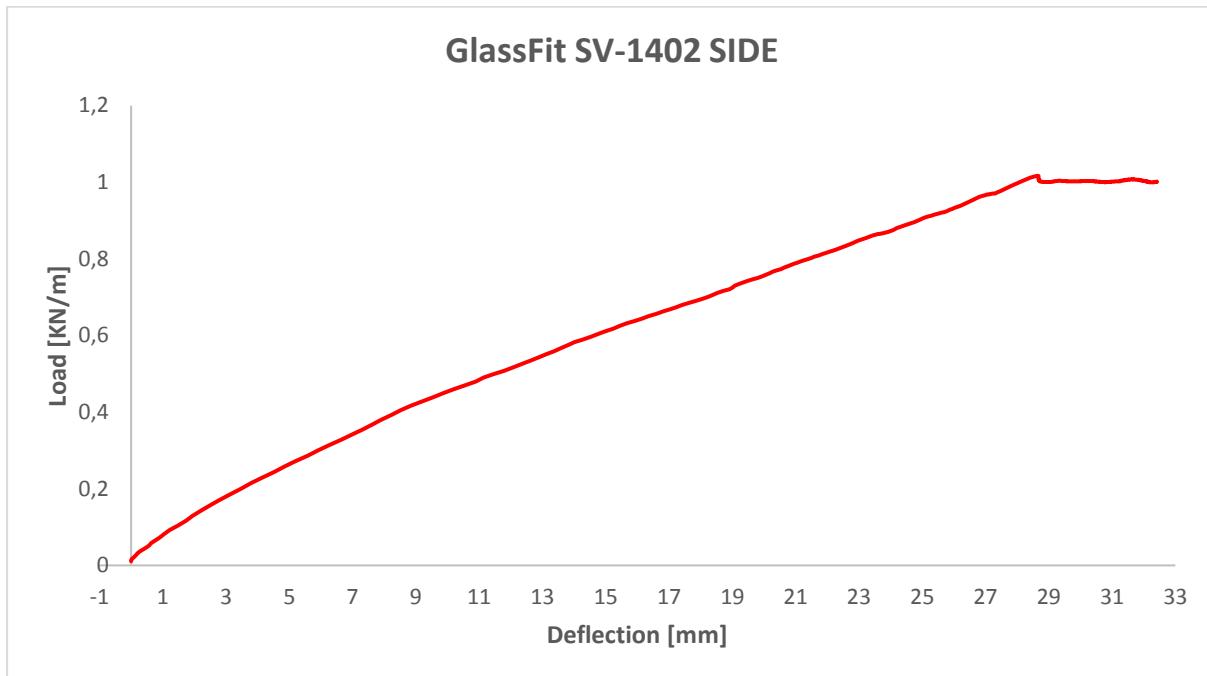Chart 2 – Load Versus Deflection Curves for Comenza Glassfit SV-1402 Side Level In / PL -14 [Q=1 kN/m]

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

APPENDIX: Figures

Figure 1 – Configuration of the model

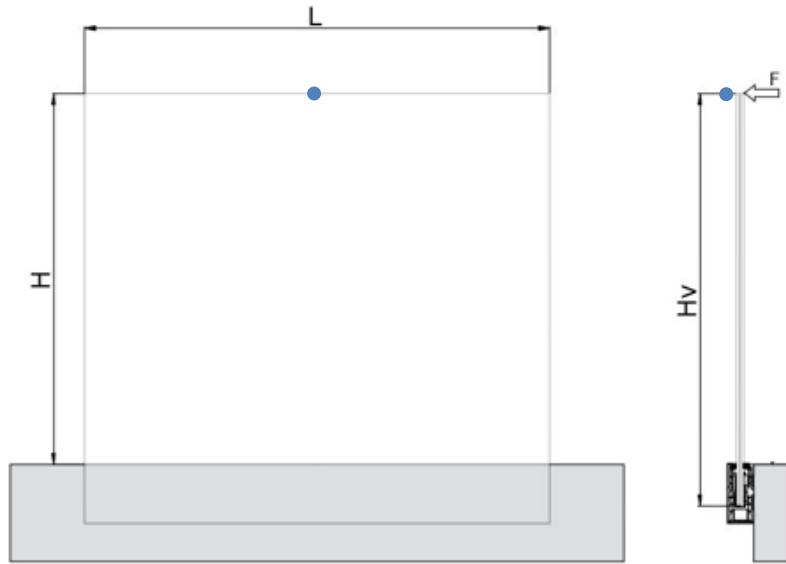


Horizontal force [kN/m]	Q	0,5 - 1
Length of the railing system[mm]	L	1000
Total force applied over the railing system[kN]	F=QxL	0,5 - 1
Effective height of the railing [mm]	H	1000
Effective height of the glass [mm]	Hv	1107

- TRANSDUCER

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.


Figure 2 – Glassfit SV-1402 SIDE – components

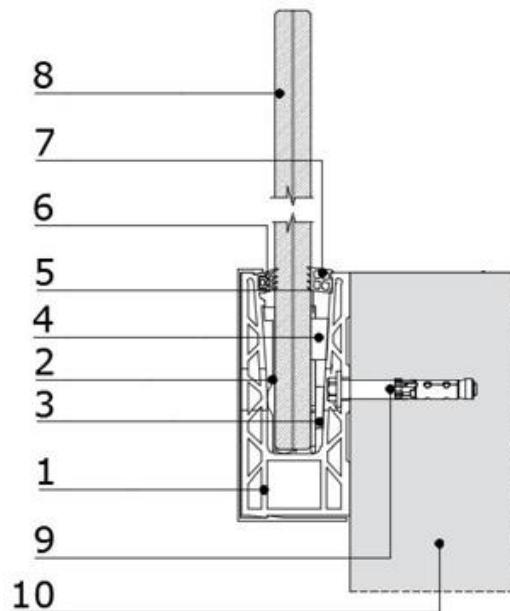


Item	References	Quantity	Units
1	Aluminum profile ref: SV-1402 SIDE	1	metre
2	L Spacer ref: PL-20	4	unit
3	"Bottom wedge" ref: PL-21 17,52	4	unit
4	"Top wedge" ref: PL-22 17,52	3	unit
5	Device "Top wedge" ref: PL-23	3	unit
6	Rubber ref: PL-24	1	metre
7	Rubber ref: PL-25	1	metre
8	Laminated tempered glass 88.4 [17.52] Dimensions (LxH): 1000x1107	1	unit
9	Anchor Fisher FH II 12/25 S A4	4	unit
10	Concrete base	1	unit

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

Figure 3 – Glassfit SV-1402 SIDE

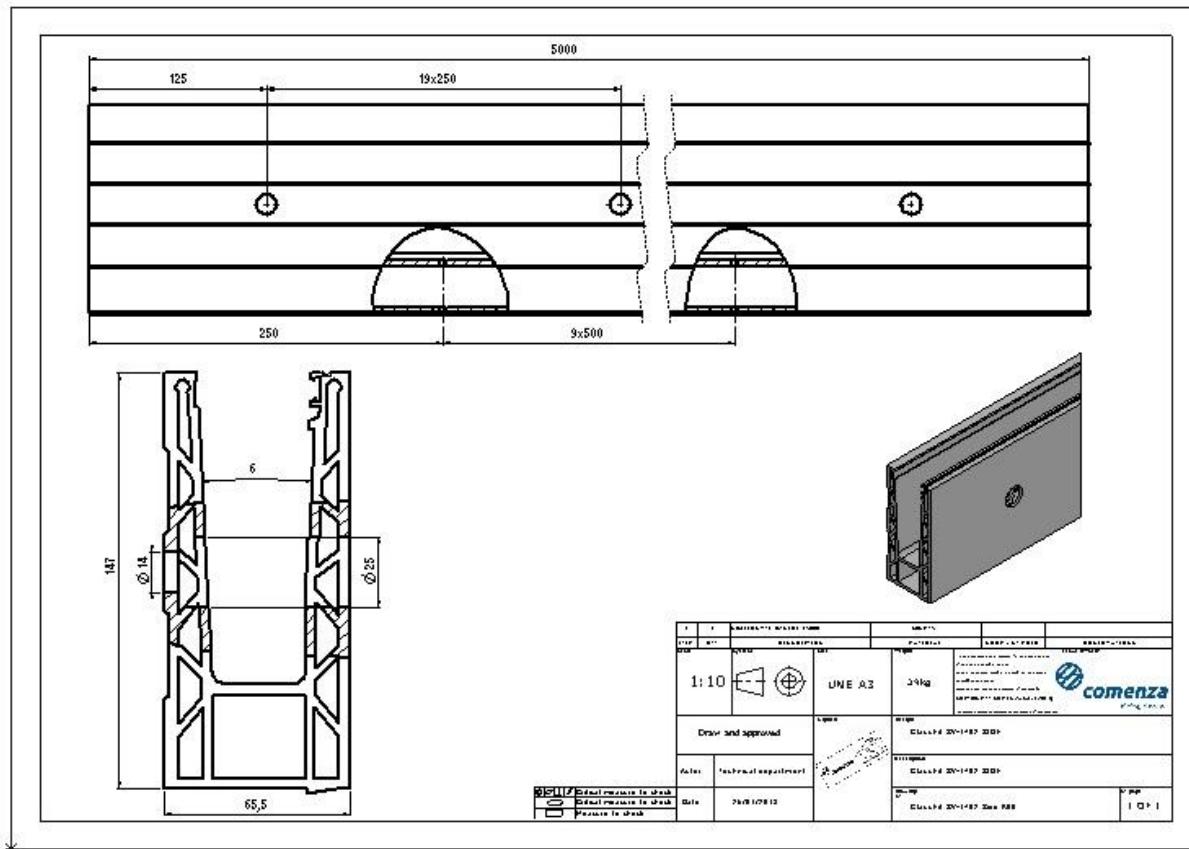

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.

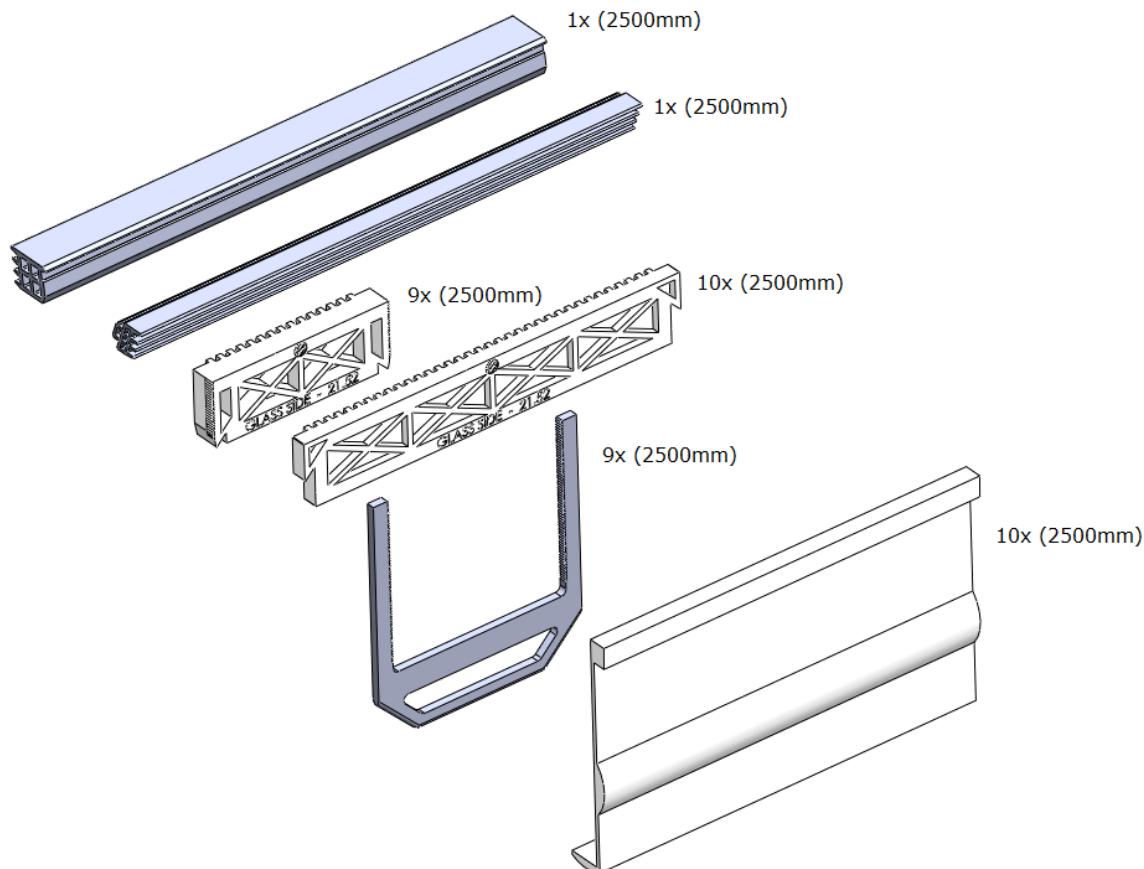Figure 4 – Level In / PL-14 adjustable fixing system

* The results given in this report apply only to the samples that have been tested under the conditions specified in the standards or test methods cited in this document. This report shall not be reproduced in part without the written approval of Comenza, nor used in any way as to lead to misrepresentation of the results or their implications.